

## SILICON RUBBER COLD SHRINKABLE CABLE ACCESSORIES

### DESCRIPTION OF YTYPE

□ LS - □ / □ · □


Size of Conductor: "1": 25-50mm<sup>2</sup>; "2": 70-120mm<sup>2</sup>; "3": 150-240mm<sup>2</sup>; "4": 300-500mm<sup>2</sup>.

Cable cores: From 1C to 5C;

Voltage Grade: "1": 1KV, "11": 11KV

Cold shrinkable "24": 24KV, "36": 36KV

Usage rang: W-Outdoor termination; N-Indoor termination; J-Straight through joint  
 "WSY-15/3.1": 8.7/17.5KV Silicon rubber cold shrinkable outdoor termination:  
 three cores, Size of Conductor is 25-50mm<sup>2</sup>.

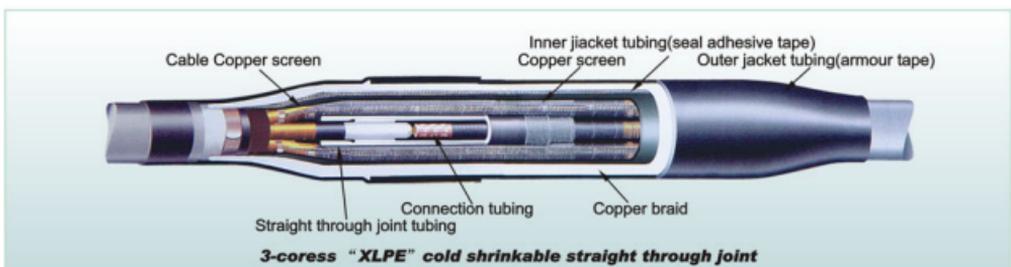

## 11KV COLD SHRINKABLE CABLE ACCESSORIES



### Technical Data

Property	Typical data
Ac withstand(under rain)	45KV/1min
Ac withstand(without rain)	45KV/1min
Impulse withstand	±105KV/10times
Dc withstand	-52KV/15min
Ac withstand	35KV/4h
Partial discharge test	≤10Pc(1.73U <sub>0</sub> )



**3-cores cold shrinkable straight through joint kit**



**3-cores cold shrinkable outdoor termination kit**

Dimension(mm)

Description of goods	Specification	Size of Conductor (mm <sup>2</sup> )	Specification	Size of Conductor (mm <sup>2</sup> )
Single core indoor termination kit	NLS-15/1.1	25-50	NLS-15/1.3	150-240
	NLS-15/1.2	70-120	NLS-15/1.4	300-500
Single core outdoor termination kit	WLS-15/1.1	25-50	WLS-15/1.3	150-240
	WLS-15/1.2	70-120	WLS-15/1.4	300-500
Single core straight through joint	JLS-15/1.1	25-50	JLS-15/1.3	150-240
	JLS-15/1.2	70-120	JLS-15/1.4	300-500
3-cores indoor termination kit	NLS-15/3.1	25-50	NLS-15/3.3	150-240
	NLS-15/3.2	70-120	NLS-15/3.4	300-500
3-cores outdoor termination kit	WLS-15/3.1	25-50	WLS-15/3.3	150-240
	WLS-15/3.2	70-120	WLS-15/3.4	300-500
3-cores straight through joint	JLS-15/3.1	25-50	JLS-15/3.3	150-240
	JLS-15/3.2	70-120	JLS-15/3.4	300-500